

The following information is required for ordering Liftable Air Suspensions for installation on trailers. Obtaining as much of this information as possible in advance will speed the ordering and manufacturing process.

Application: Pusher Tag 2nd Axle 3rd Axle 4th Axle For Stock

Axle Spacing: _____ from nearest drive axle to liftable axle

Required Capacity: _____

Frame Width: Indicate on the drawing below. Include any frame reinforcement and/or gloving.

Frame Height: Indicate on the drawing below, both loaded and unloaded frame heights.


Tire Size: Indicate on the drawing below the size of the tire to be used on the liftable axle; also indicate the loaded tire radius if known.

Hubs & Drums: Cast Spoke ____ 20" ____ 15" Hub Piloted
 Ten Hole Disc ____ 20" ____ 15" Short Stud
 ____ Budd (stud piloted) Long Stud

Air Brakes

Self-Steering

Special Requirements:

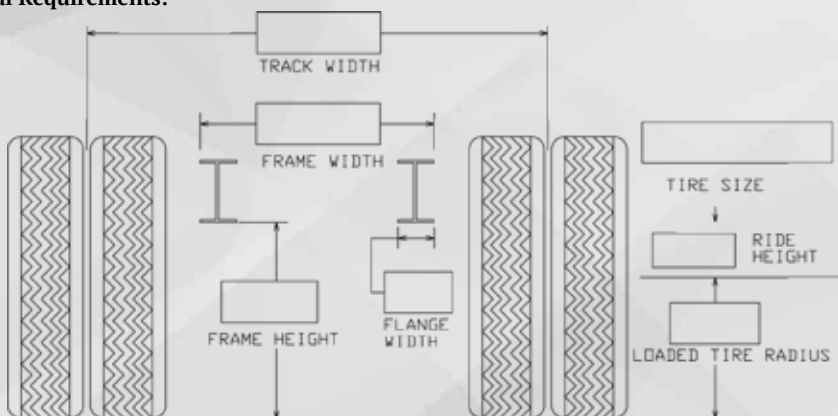

READY TO ORDER? CALL 800-658-3866